COMBINATION INSTALLATIONS

dacor The Life of the Kitchen®

DR30GI[F]S Range with ERV3015 Raised Vent

PLANNING GUIDE

RAISED VENT (SELF-RIMMING) INSTALLATION CUTOUT OPTIONS (MODELS DR30GIS AND DR30GIFS ONLY)

All tolerances +1/16" (+1.6 mm), -0 unless otherwise noted.

For all installations with a raised vent:

Countertop height: 34 3/4" (88.3 cm) min.
36 7/8" (93.7 cm) max.
Countertop thickness: 1 5/8" (4.1 cm) max.

NOTE: For all raised vent installations, use only Dacor raised vent model ERV3015. This configuration is not compatible with cabinet blower model CABP3.

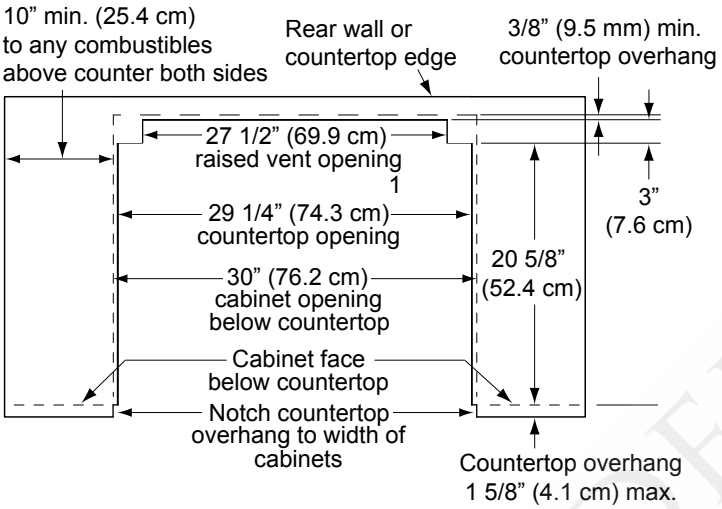

24" - 24 1/4" CABINET DEPTH
PARTIAL SIDE PANELS INSTALLED (TOP VIEW)[2, 3]

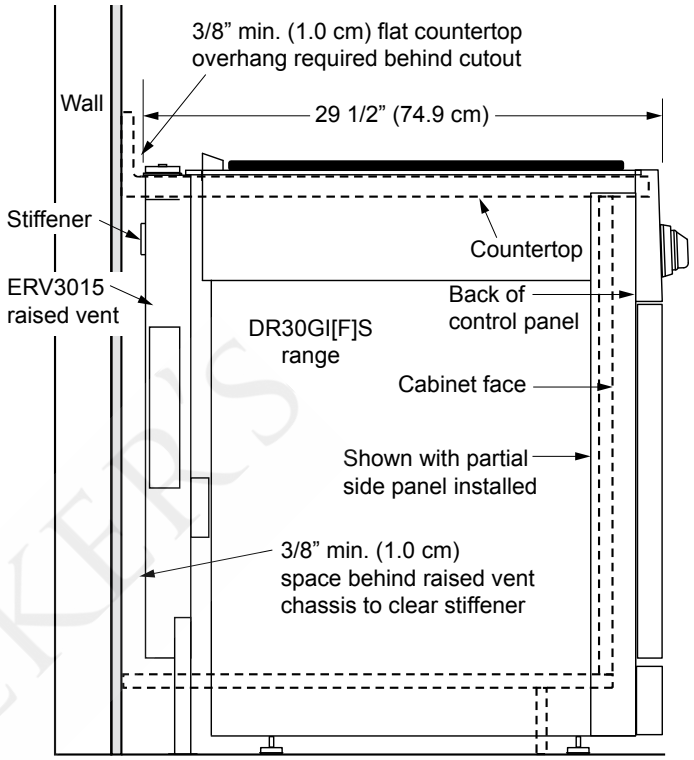

IMPORTANT: If optional side panels are not installed cabinet face must be flush with back of control panel.

SIDE VIEW - DR30GI[F]S RANGE AND ERV3015 RAISED VENT

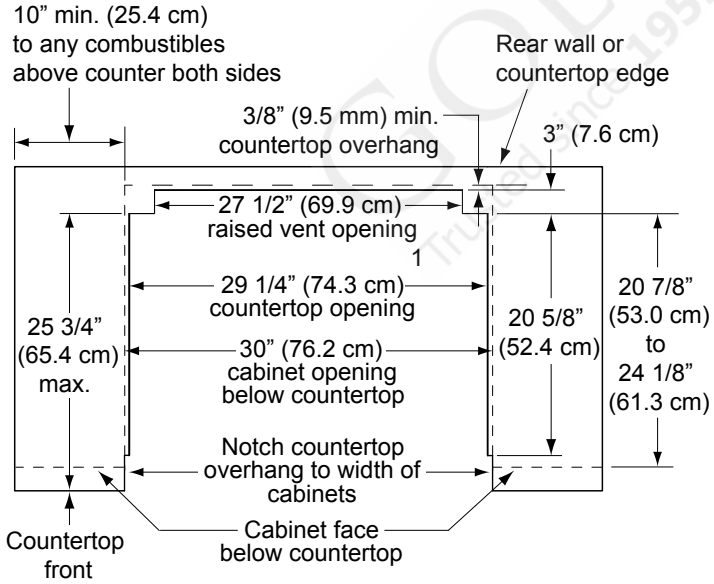

24 1/4" - 27 1/2" CABINET DEPTH
PARTIAL SIDE PANELS INSTALLED (TOP VIEW)[4]

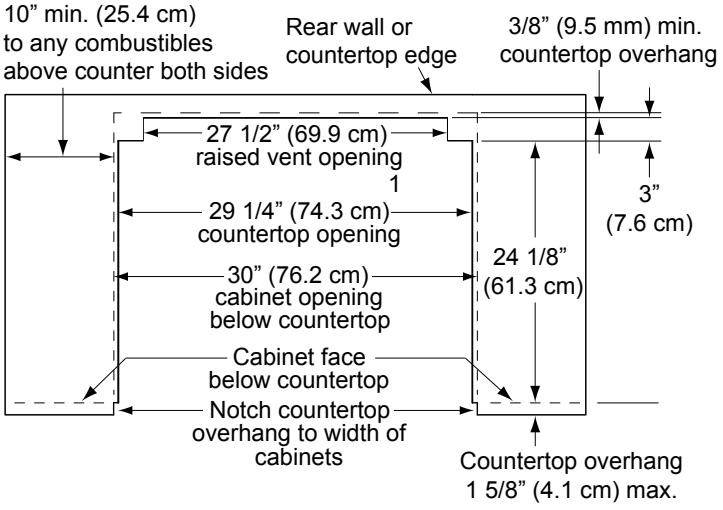

CUSTOM CABINET 27 1/2" OR DEEPER,
PARTIAL SIDE PANELS REMOVED (TOP VIEW)[4]

[1] To create a "built-in look" on the front of the cabinet, this dimension may be changed to 29 1/4" (74.3 cm). Width notches remains 30".
[2] For 24 to 24 1/4 inch deep cabinets, the side panels and control panel will protrude from the cabinet face a total of 5 5/8 inches.
[3] Revision A ranges only: Raised vent trim piece and 3 1/2 inch side panels (Dacor PN ADTK30GSR24) must be installed to cover the front of the raised vent chassis in back and range chassis on sides.
[4] Revision A ranges only: Optional raised vent trim piece (Dacor PN ADTK30GSR) must be installed to cover the front of the raised vent chassis in back.